CR-SERIES

INTEGRATED FORK POSITIONER WITH SIDESHIFT

Capacity: 1 200 – 2 500 kg

Width: 750 – 1 300 mm

HIGH PERFORMANCE AND CLAMPING

FEATURES

- Powerful all-round attachment
- Light clamp handling
- High residual capacity
- Low maintenance
- Excellent visibility for the driver



The CR-Series is the optimal attachment for reach trucks. The unique C-profile design gives excellent visibility for the driver and contributes to a safer handling of the goods. Furthermore, the unit offers lighter clamp handling and the weight of the unit is lower than corresponding designs.

The attachment has been designed for demanding applications and the additional support wheel on the back of the forks permits a smooth and soft sideshift even with full load. Self -lubricating bushings reduce the maintenance and easy access makes the replacement of spare parts swift.

The product family consists of several series where the C-series is specially designed for forklift trucks and telescopic handlers.

OPTIONS

The attachment can be equipped with pressure relief valves, load backrest and load protection, either as options or retrofitted. You can also choose forks with other dimensions, other materials and coatings as well as other hydraulic functions such as lift/drop forks and reach forks. Options such as cameras and sensors (laser, scale, IR etc.) and QC6 - Quick connect system, are also available.

The attachment can also be equipped with tilt function and as an alternative to forks, it's possible to get the attachment with carrier plates. Tailor-made solutions are manufactured on request.

MACHINES

Reach Truck

APPLICATIONS

Clamping

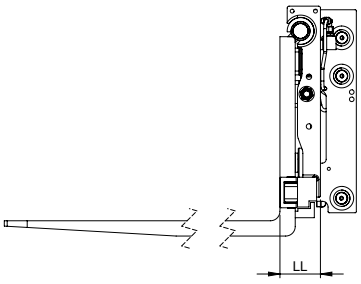

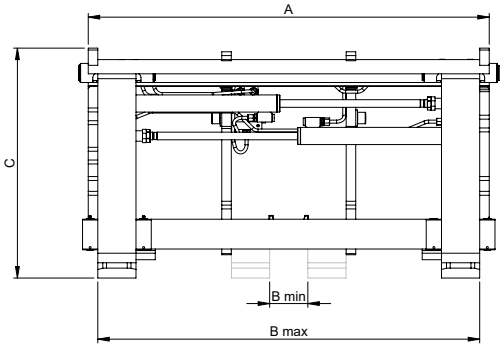

CR-SERIES

INTEGRATED FORK POSITIONER WITH SIDESHIFT

Capacity: 1 200 – 2 500 kg
Width: 750 – 1 300 mm

Model	Capacity / Load center	Width	Forks	Opening range	Sideshifting	COG	LL	Weight	Height	Mounting class
	Q / LC kg / mm	A mm	WxTxL	mm	mm (±)	mm	mm	kg	mm	ISO 2328
CR12										
CR12/075	1200/600	750	80x40x1200	300-700	107,5	246,5	106	152	602	2A/B
CR12/085		850		300-800	132,5	241		157		
CR12/088		880		300-830	140	239		158,5		
CR12/090		900		300-850	145	238		159,5		
CR16										
CR16/075	1600/600	750	100x40x1200	300-700	107,5	272	106	172	602	2A/B
CR16/085		850		300-800	132,5	266		177		
CR16/088		880		300-830	140	264		178,5		
CR16/090		900		300-850	145	263		179,5		
CR16/095		950		300-900	157,5	260		182		
CR16/100		1000		300-950	170	257		184,5		
CR16/105		1050		300-1000	182,5	254		187		
CR16/110		1100		300-1050	195	251		189,5		
CR16/115		1150		300-1100	207,5	248		192		
CR16/120		1200		300-1150	220	245		194,5		
CR16/125		1250		300-1200	232,5	242		197		
CR16/130		1300		300-1250	245	239		199,5		
CR20										
CR20/075	2000/600	750	100x45x1200	300-700	107,5	282,5	111	184	602	2A/B
CR20/088		880		300-830	140	275,5		190,5		
CR20/090		900		300-850	145	274,25		191,5		
CR20/095		950		300-900	157,5	271,5		194		
CR20/100		100		300-950	170	268,75		196,5		
CR20/105		1050		300-1000	182,5	266		199		
CR20/110		1100		300-1050	195	263,25		201,5		
CR20/115		1150		300-1100	207,5	260,5		204		
CR20/120		1200		300-1150	220	257,75		206,5		
CR20/125		1250		300-1200	232,5	255		209		
CR20/130		1300		300-1250	242	252,25		211,5		

NOTES

From C16 and up, the attachments are equipped with an additional support wheel on the back of the forks for higher performance.

OPTIONS

Attachments with CRT and other width are manufactured on request.

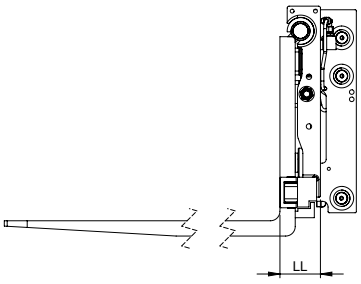

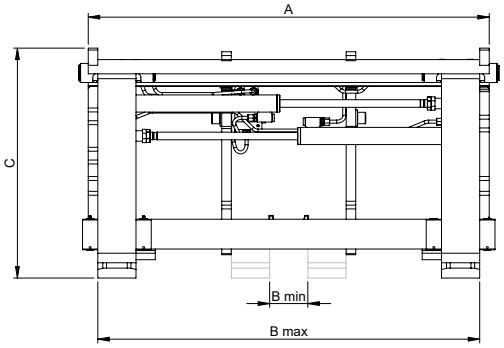

CR-SERIES

INTEGRATED FORK POSITIONER WITH SIDESHIFT

Capacity: 1 200 – 2 500 kg
Width: 750 – 1 300 mm

Model	Capacity / Load center	Width	Forks	Opening range	Sideshifting	COG	LL	Weight	Height	Mounting class
	Q / LC kg / mm	A mm	WxTxL	mm	mm (±)	mm	mm	kg	mm	ISO 2328
CR25										
CR25/075	2500/600	750	100x45x1200	370-690	104,5	194	121	263,5	707	2A/B
CR25/088		880		370-820	134,5	190		272,5		
CR25/090		900		370-840	139,5	189,5		274		
CR25/100		1000		370-940	164,5	186,5		281		
CR25/105		1050		370-990	177	185		284,5		
CR25/110		1100		370-1040	189,5	183,5		288		
CR25/115		1150		370-1090	202	182		291,5		
CR25/120		1200		370-1140	214,5	180,5		295		
CR25/125		1250		370-1190	227	179		298,5		
CR25/130		1300		370-1240	239,5	177,5		302		

NOTES

From C16 and up, the attachments are equipped with an additional support wheel on the back of the forks for higher performance.

OPTIONS

Attachments with CRT and other width are manufactured on request.