

INTEGRATED FORK POSITIONER WITH SIDESHIFT


Capacity: 1 200 – 3 000 kg
Width: 750 – 1 300 mm



HIGH PERFORMANCE AND CLAMPING

FEATURES

- Powerful all-round attachment
- Light clamp handling
- High residual capacity
- Low maintenance
- Excellent visibility for the driver

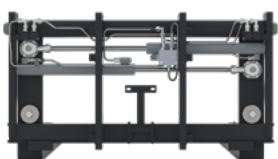

The CR-Series is the optimal attachment for reach trucks. The unique C-profile design gives excellent visibility for the driver and contributes to a safer handling of the goods. Furthermore, the unit offers lighter clamp handling and the weight of the unit is lower than corresponding designs.

The attachment has been designed for demanding applications and the additional support wheel on the back of the forks permits a smooth and soft sideshift even with full load. Self-lubricating bushings reduce the maintenance and easy access makes the replacement of spare parts swift.

The product family consists of several series where the C-series is specially designed for forklift trucks and telescopic handlers.

OPTIONS

The attachment can be equipped with pressure relief valves, load backrest and load protection, either as options or retrofitted. You can also choose forks with other dimensions, other materials and coatings as well as other hydraulic functions such as lift/drop forks and reach forks. Options such as cameras and sensors (laser, scale, IR etc.) and QC6 - Quick connect system, are also available.

The attachment can also be equipped with tilt function and as an alternative to forks, it's possible to get the attachment with carrier plates. Tailor-made solutions are manufactured on request.

MACHINES



Reach Truck

APPLICATIONS





Clamping

INTEGRERAD GAFFELSPRIDARE MED SIDOFÖRING

Kapacitet: 1200 - 3 000 kg

Bredd: 750 - 1300 mm

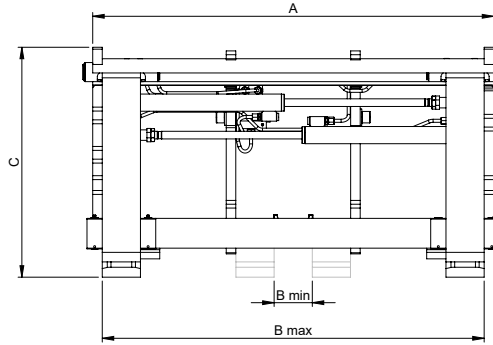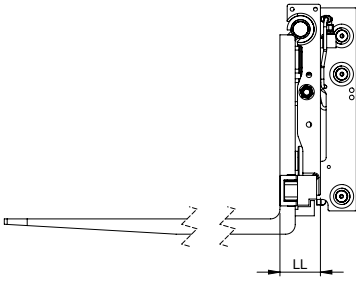

Model	Capacity / Load center	Width	Forks	Opening range	Sideshift	COG	LL	Weight	Height	Mounting class
	Q / LC kg / mm									
CR12										
CR12/075	1200/600	750	80x40x1200	300-700	107,5	246,5	106	152	602	2A/B
CR12/085		850		300-800	132,5	241		157		
CR12/088		880		300-830	140	239		158,5		
CR12/090		900		300-850	145	238		159,5		
CR25										
CR25/075	2000/600	750	100x40x1200	300-700	107,5	282,5	111	184	602	2A/B
CR25/088		880		300-830	140	275,5		190,5		
CR25/090		900		300-850	145	274,25		191,5		
CR25/095		950		300-900	157,5	271,5		194		
CR25/100		1000		300-950	170	268,75		196,5		
CR25/105		1050		300-1000	182,5	266		199		
CR25/110		1100		300-1050	195	263,25		201,5		
CR25/115		1150		300-1100	207,5	260,5		204		
CR25/120		1200		300-1150	220	257,75		206,5		
CR25/125		1250		300-1200	232,5	255		209		
CR25/130	1300	300-1250	242	252,25	211,5					
CR30										
CR30/075	3000/600	750	125x45x1200	370-690	104,5	194	121	263,5	707	2-3A/B
CR30/088		880		370-820	134,5	190		272,5		
CR30/090		900		370-840	139,5	189,5		274		
CR30/100		1000		370-940	164,5	186,5		281		
CR30/105		1050		370-990	177	185		284,5		
CR30/110		1100		370-1040	189,5	183,5		288		
CR30/115		1150		370-1090	202	182		291,5		
CR30/120		1200		370-1140	214,5	180,5		295		
CR30/125		1250		370-1190	227	179		298,5		
CR30/130		1300		370-1240	239,5	177,5		302		