

INTEGRATED FORK POSITIONER WITH OVER-CENTER SIDESHIFT

Capacity: 1 600 – 2 500 kg

Width: 950 – 1 200 mm



SUITED FOR WAREHOUSES AND TERMINALS

FEATURES

- Over-center sideshift
- Light clamp handling
- High residual capacity
- Low maintenance
- Excellent visibility for the driver



The COC-series is one of our problem-solving products. As most people in our industry know, there is always a risk of damage to the attachment and goods when loading and unloading trucks. The goods are usually placed along the sidewall of the truck. They are also used to push the goods in place. This might damage the attachment as well as the truck and the goods. We have solved this problem thanks to our clever and unique design. The pallets can be sideshifted outside the frame, which makes loading and unloading easy, smooth and time saving.

Self-lubricating bushings reduce the maintenance and easy access makes the replacement of spare parts swift.

OPTIONS

The attachment can be equipped with pressure relief valves, load support and load protection, either as options or retrofitted. You can also choose forks with other dimensions, other materials and coatings as well as other hydraulic functions such as skewed forks and reach forks. Options such as cameras and sensors (laser, wave cells, IR etc.) and QCC6 - Quick connect system, are also available.

As an alternative to forks, it's possible to get the attachments with carrier plates. We can also replace the integration to the mast with Hook-on for ISO mounting, quick coupler brackets or other type of attachment brackets. Tailor-made solutions are manufactured on request.

MACHINES



Forklift Truck



Reach Truck



Telescopic handler

APPLICATIONS



Clamping




Loading/unloading

INTEGRATED FORK POSITIONER WITH OVER-CENTER SIDESHIFT

Capacity: 1 600 – 2 500 kg

Width: 950 – 1 200 mm

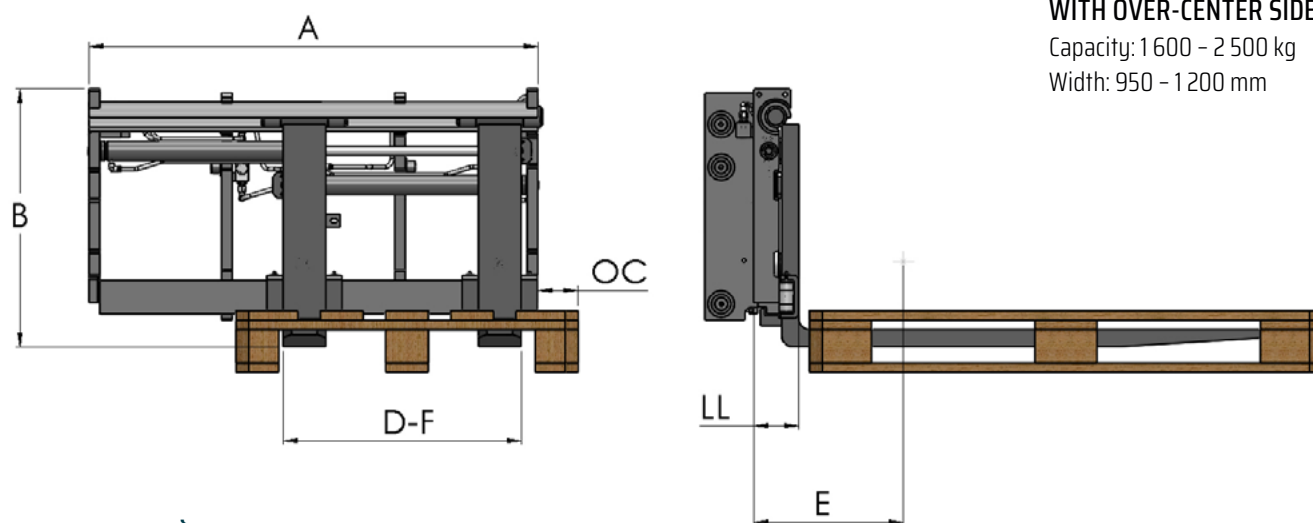

Model	Capacity / Load center	Width	Forks	Opening range	OC	COG	LL	Weight	Height	Mounting class
	Q / LC kg / mm	A mm	WxTxL	mm	mm	mm	mm	kg	mm	ISO 2328
COC16										
COC16/095	1600/500	950	80x40x1200	300-870	145	235	106	162	602	2A/B
COC16/099		990		300-910	120	233		164		
COC16/105		1050		300-970	95	229,5		167		
COC16/110		1100		300-1020	70	227		169,5		
COC16/115		1150		300-1070	45	224		172		
COC16/120		1200		300-1120	20	221		174,5		
COC25										
COC25/095	2000/500	950	100x40x1200	300-870	145	260	106	182	602	2A/B
COC25/100		1000		300-920	120	257		185		
COC25/105	2000/600	1050		300-970	95	254		187,5		
COC25/110		1100		300-1020	70	251		190		
COC25/115	2500/500	1150		300-1070	45	248		192,5		
COC25/120		1200		300-1120	20	245		195		

OPTIONS

On request, the attachment can be manufactured with a width up to 1 400 mm and a capacity of up to 5 000kg.