


INTEGRATED FORK POSITIONER WITH SIDESHIFT AND SLOPING

Capacity: 8 000 kg

Width: 1 000 – 3 000 mm

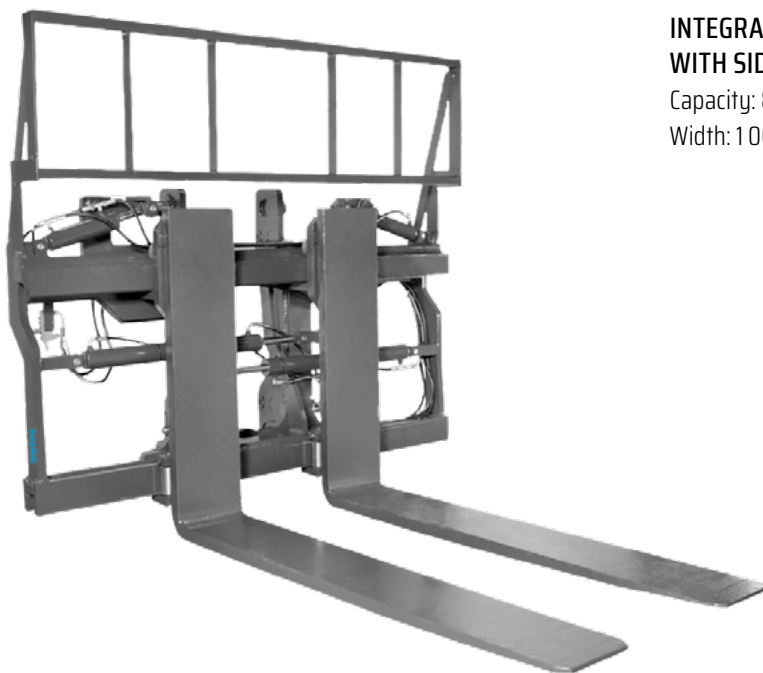

ROBUST WITH POWERED PILE SLOPE

FEATURES

- Built for heavy loads
- Sloping function
- Protected piping
- Maximum visibility for the driver



F4S is constructed for tough environments and where there are very high demands on unit. The forks are roller-mounted using 6 rollers on each fork (4 up and 2 down). The attachment sideshifts easily and smoothly even with heavy loads. F4S also has a powered pile slope function which allows “tilt” of ± 4 -5 degrees. The visibility for the driver is outstanding, making work safe and secure. F4S is an excellent choice for the wood industry.

OPTIONS

Load backrest can be added to the attachment. You can choose forks with other dimensions, other materials and coatings but also with other functions such as KOOL-reachforks® and SmartFork® with sensor technology. The attachment is also available with Carrier plats and QC6 quick-connect system.

MACHINES



Forklift Truck



Telescopic handler

APPLICATIONS



Heavy loads



Dirty environments




Rugged terrain

INTEGRATED FORK POSITIONER WITH SIDESHIFT AND SLOPING

Capacity: 8 000 kg

Width: 1 000 - 3 000 mm

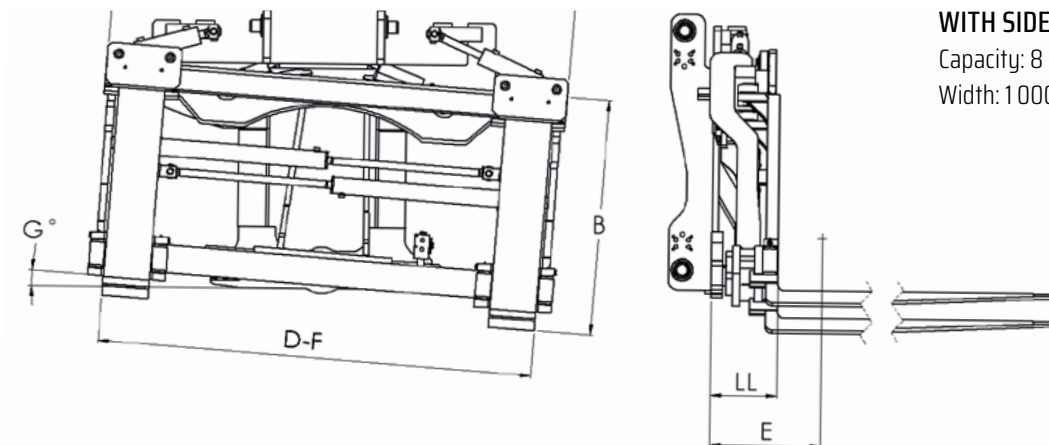

Model type	Capacity / Load Centre	Frame Width	Opening Range	Forks	Degrees of slope	Centre of gravity	Height	Weight	Effective Thickness
	Q / LC kg / mm	A mm	D-F mm	WxTxL mm	G °	E [c.] mm	B mm	kg	LL mm
F4S-81									
F4S-81/1800	8000/600	1800	450-1650	150x65x1200	± 5	190	950	1520	146
F4S-81/1900		1900	450-1750			185		1540	
F4S-81/2000		2000	450-1850			180		1560	
F4S-81/2100		2100	450-1950			175		1580	
F4S-81/2200		2200	450-2050			170		1600	
F4S-81/2300		2300	450-2150			165		1620	
F4S-81/2400		2400	450-2250			160		1640	
F4S-140									
F4S-140/1800	8000/1100	1800	540-1700	200x70x2400	± 5	480	1160	1950	300
F4S-140/1900		1900	540-1800			450		2000	
F4S-140/2000		2000	540-1900			420		2050	
F4S-140/2100		2100	540-2000			390		2100	
F4S-140/2200		2200	540-2100			360		2150	
F4S-140/2300		2300	540-2200			330		2200	
F4S-140/2400		2400	540-2300			300		2250	
F4S-140/2500		2500	540-2400			270		2300	