


## ADAPTERS

Capacity: 1 000 - 18 000 kg

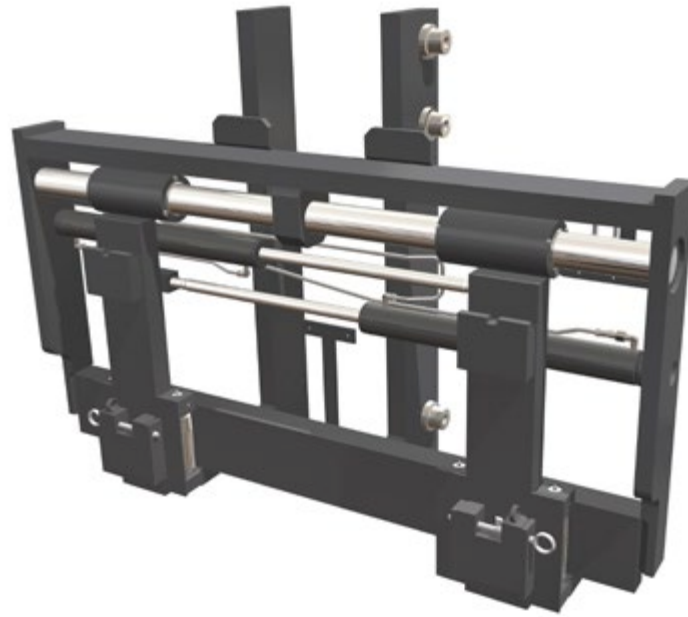

## MANUAL QUICK COUPLER

### FEATURES

- Functions as a quick coupler
- Carries both forks and mechanical attachments
- Available for all our fork positioners

**CarrierPlates** are adapters that expand the functionality of your Hagaberg fork positioner. They allow you to switch between hook-on forks of different lengths and also enable the mounting of mechanical attachments and tools.

The adapters are equipped with quick-release hooks and feature pin locking at the bottom, making it easy to change between different forks and attachments. We offer solutions for both ISO forks (Class 2, 3, 4, and 5) and higher capacities using TWS hooks (Terminal West Suspension).

### ADAPTIONS

If your fork positioner needs to carry hydraulic forks or hydraulic-powered attachments, CarryAll™ is the right solution. By combining CarrierPlates with hydraulic quick couplings, the CarryAll™ system provides a flexible setup that enables fast and secure connection of tools with active functions.



## ADAPTERS

Capacity: 1 000 – 18 000 kg



Model	Capacity (kg) / LC (mm)	Width CarrierPlate (mm)	Class ISO 2328 / TWS
CP, C12-25	2500 / 500	100	2
CP, C35	3500 / 500	125	2,3
CP, C50	5000 / 500	125	3
CP, C50E-60	6000 / 600	150	3,4
CP, C70-C80	8000 / 600	150	4
CP, C80E	8000 / 900	150	4
CP, C80X	8000 / 1100	200	4
CP, E2-20/25	2500 / 500	100	2
CP, E3-30/35	3500 / 500	125	2,3
CP, E4-50	5000 / 500	125	3
CP, E4-50E-60	6000 / 600	150	3,4
CP, E4-70-80	8000 / 600	150	4
CP, E4-80E	8000 / 900	150	4
CP, F4-60	6000 / 600	150	3,4
CP, F4-80	8000 / 600	150	4
CP, F4-120	8000 / 900	150	4
CP, F4-140	8000 / 1100	200	4
CP, RHD-100	10 000 / 600	200	TWS
CP, RHD-120	12 000 / 600	200	TWS
CP, RHD-140	14 000 / 600	200	TWS
CP, RHD-150	15 000 / 600	200	TWS
CP, RHD-160	16 000 / 600	200	TWS
CP, RHD-180	18 000 / 600	200	TWS
CP, RHD-180E	18 000 / 900	250	TWS
CP, RHD-100X	10 000 / 1200	200	TWS
CP, RHD-120X	12 000 / 1200	200	TWS
CP, RHD-140X	14 000 / 1200	250	TWS
CP, RHD-150X	15 000 / 1200	250	TWS
CP, RHD-160X	16 000 / 1200	250	TWS

### NOTE

All capacities up to 11 tonnes can be offered with ISO or TWS suspension.  
 Capacities exceeding 11 tonnes are offered with TWS-suspension.  
 Forks not included.